
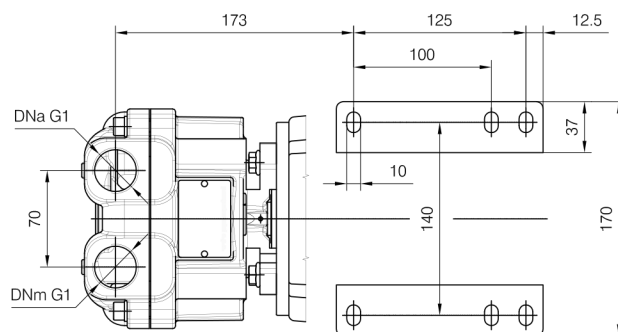
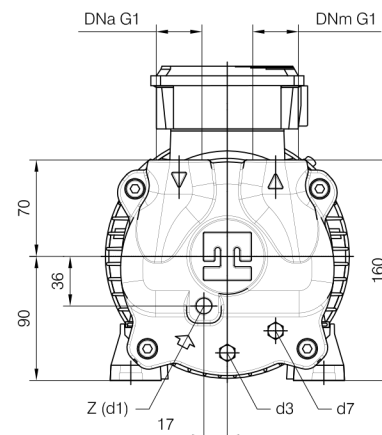


Overall Dimensions

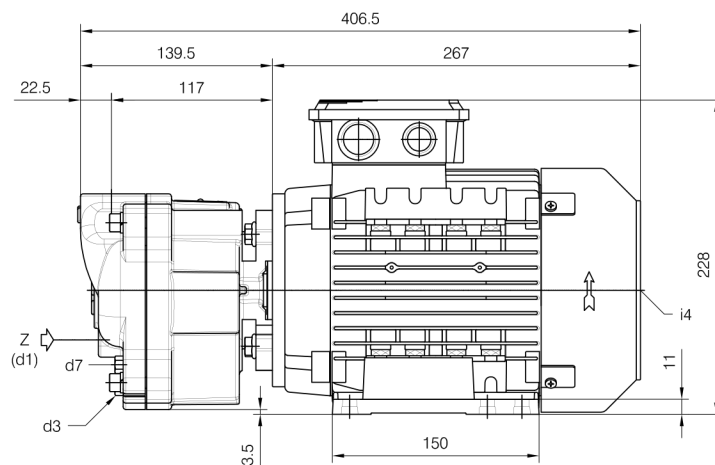

Pump type	Weight	Mi kgm ²	Lt
TRMX 257	25	0.006	0.4

**Multi-frequency Electric Motor
IP 55 - 2 poles - 50/60 Hz**

Frame size IEC	RPM 2900 50Hz V. 230-400		RPM 3500 60Hz V. 265-460 V. 230-400	
	kW	HP	kW	HP
90 L	1.5	2	2.2	3

- G1 1" Threaded
d1 1/4" threaded connection - for liquid supply inlet
d3 1/8" plugged connection - for pump casing drain
d7 1/8" plugged connection - for anticavitation valve
i4 Threaded hole for motor shaft rotation checking

Note : Lt Water quantity at shaft axis in liters
Mi Max Moment of Inertia at start-up

Schematic drawing. Dimensions in mm with tolerances according to EN 735-1995 standards.
Weights in Kgs, referred to pumps in cast iron, not binding.



Premier Fluid Systems
Canadian Home of Travaini Pumps

4161 Morris Dr. - Unit 5 * Burlington * Ontario * L7L 5L5 * Website: www.pfspumps.com
Tel: 1-800-461-2611 or 905-637-2611 * Fax: 905-333-4722 * email: info@pfspumps.com

DATE : SEPT. 22 2017

N°.: 6.7.4