



TRSA 200

Single Stage Liquid Ring Vacuum Pump



TRAVAINI

- PRESSURE RANGE** : 150 to 760 TORR
CAPACITY : 1000 to 2180 CFM
- FEATURES** : Single stage rotating pump with externally located bearings grease lubricated
- SHAFT SEALING** : Mechanical seal - Double mechanical seal or stuffing box optional
- OPTIONS** : Bareshaft pump - Coupled to electric motor on baseplate - V-belt driven
- ACCESSORIES** : (Optional) Flange mounted air-liquid separator tank, non-return valve, vacuum relief valve, vacuum gauge and piped service liquid line with isolating valve, Y-strainer, 1/60/120 solenoid valve, flow regulating valve and compound gauge

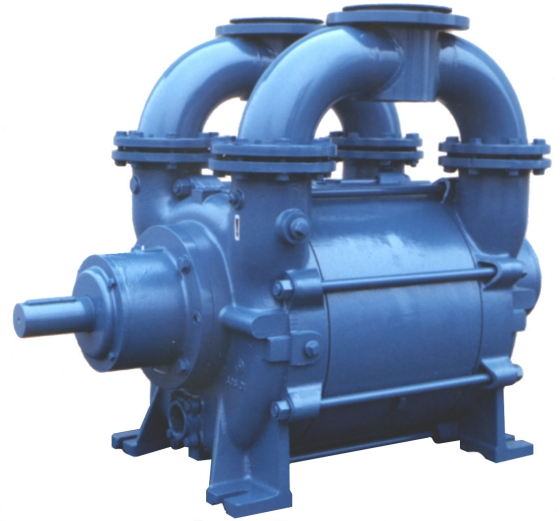

TECHNICAL DATA

PUMP TYPE		TRSA 200-1950		TRSA 200-2500		TRSA 200-3100	
Speed	RPM	730	880	730	880	730	880
Motor - installed power	HP	100	125	100	150	125	200
Average service liquid flow	GPM	40	40	50	55	50	60
Noise level at 150 Torr	dB(A)	84	85	84	85	85	85
Minimum suction pressure	Torr	150	150	150	150	150	150

MODEL DESIGNATION

TRSA 200 - 3100 / C / GH	
T	Travaini manufacturer
R	Liquid ring pump
S	Single stage pump
A	Design number
200	Flange size (mm)
3100	Nominal capacity (m ³ /h)
C	Shaft Sealing C = Mechanical seal C2 = Double mech. seal B = Packing seal
GH	Materials of construction (see table)

Standard Materials of Construction **					
Part No.	Description	GH	F	RA	A3
106	Suction casing	Cast iron			Stainless steel AISI 316
107	Discharge casing	Cast iron			
137	Port plate	Cast iron			
110	Impeller housing	Carbon steel			Stainless steel AISI 316
210	Shaft	Stainless steel AISI 420		Stainless steel AISI 316	
147	Manifold	Carbon steel			
357	Bearing housing	Cast iron			Stainless steel AISI 316
230	Impeller	Bronze	Ductile iron	Stainless steel AISI 316	

**Special Materials Available Upon Request

- Request information on our HYDROSYS and DYNASEAL engineered vacuum systems
- For further information please consult Premier Fluid Systems Inc.



Premier Fluid Systems
 Canadian Home Of Travaini Pumps